


Item No.:SMARM


Installation guide

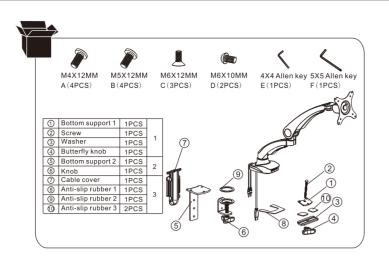

STEP2-B

Option 2:Grommet

▲ For table thickness:20-90mm

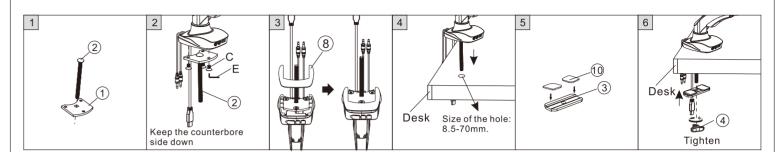










STEP1


Preparations before installing monitor

- 1. Make sure there are VESA holes 100x100mm or 75x75mm in the monitor. If not, the mount couldn't be installed.
- 2. Remove the original fixed base of monitor. Be careful not to scratch the screen.




STEP3

Attaching the monitor to the plate

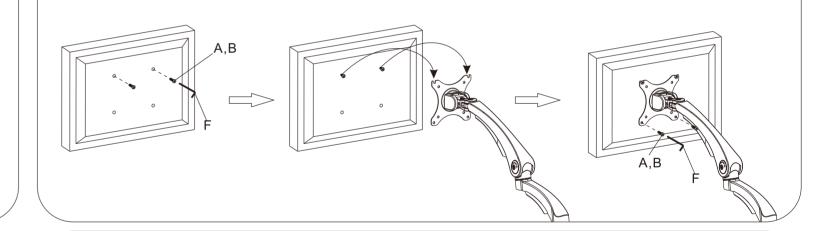


STEP2-A


Option 1:Clamp

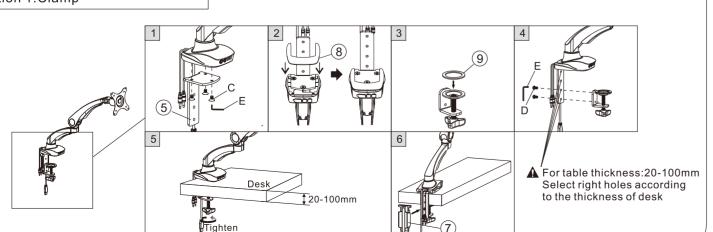

STEP4


Using cord management







STEP5


Adjusting display

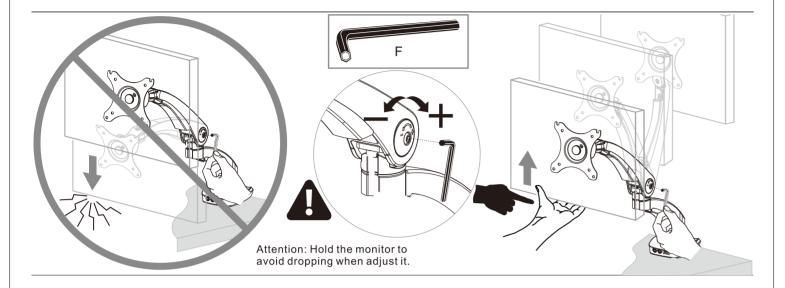
















CAUTION

This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children.

- Make Sure these instructions are read and completely understood before attempting installation. If you are unsure of any part of this installation, please contact a professional
- The desk or mounting surface must be capable of supporting the combined weight of the mount and the display, otherwise the structure must be reinforced.
 Safety gear and proper tools must be used. A minimum of two people are required for this installation. Failure to use safety gear can result in property damage, serious injury or
- please check joint parts every two months, making sure the screws are loosened or not.

This product was designed to be installed on desk. Before installing, make sure the mount will support the combined load of the equipment and hardware. Never exceed the maximum load capacity 5 KG, or else it may result in product failure or personal injury.

Note: this product is intended for indoor use only. Use of this product outdoors could lead to product failure or personal injury.